



**BLUES**  
height 1400 mm, length 500 mm. Chrome-plated finish (cod. 50).



**Technical features:**



- stainless steel towel warmer radiator
- horizontal elements with 15x30 mm rectangular tube
- side manifolds with 30x30 mm square section
- threading at the ends of the lower manifolds, 1/2" Gas right
- maximum working pressure 4 bar
- maximum working temperature 95°C

**Price included:**


- 4 wall fixings
- 2 air vents of 1/2"

Finishes available	Surcharge
Satin Stainless Steel (cod. AS)	
Mirror (cod. IS)	

Recommended, optional, angled or 50 mm valves, see page 565.

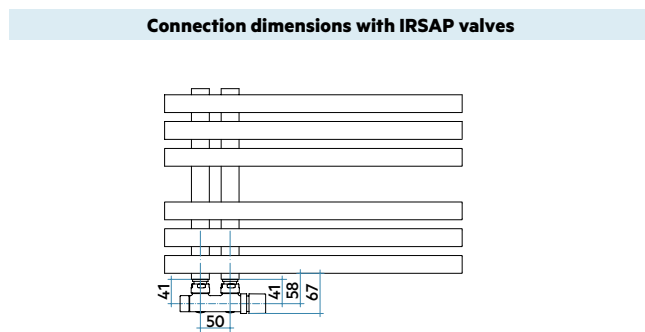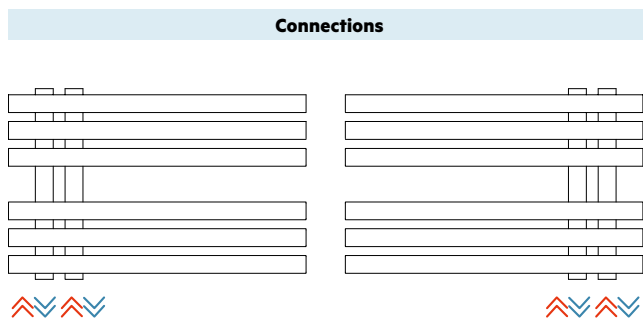

Details of the Blues radiator in the finishes Mirror (code IS) - fig. 1 and Satin Stainless Steel (code AS) - fig. 2.

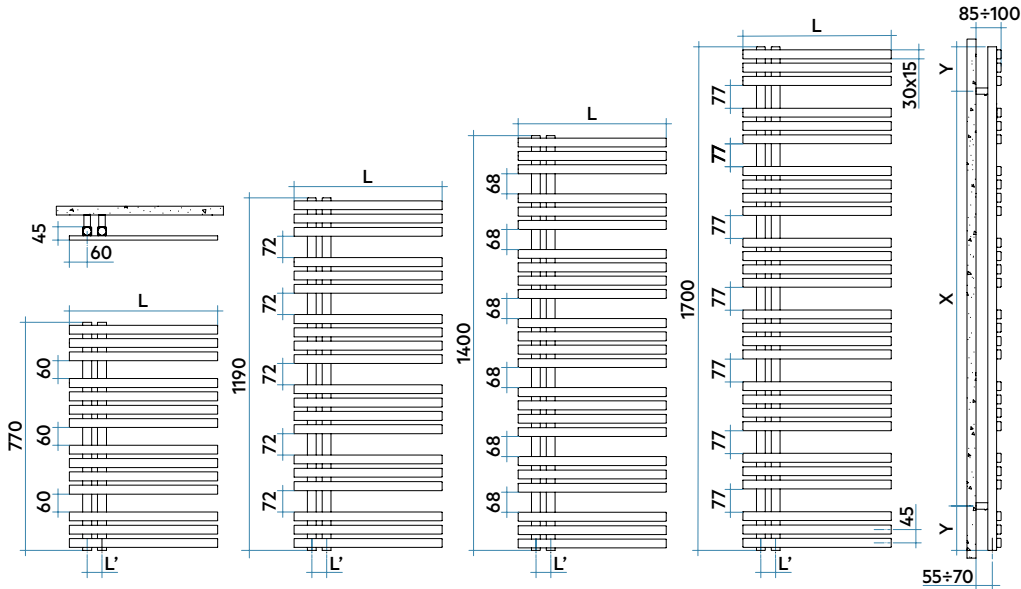

Model	Code	Depth P mm	Height H mm	Width L mm	Conn. C. L' mm	Weight Kg	Cap. lt	Thermal Power				Exp. n.	
								$\Delta t=50^{\circ}\text{C}$ Btu/h	<b>Watt</b>	$\Delta t=40^{\circ}\text{C}$ Watt	$\Delta t=30^{\circ}\text{C}$ Watt (*)		$\Delta t=20^{\circ}\text{C}$ Watt
770 14 rails 3 espaces	<b>BLS050 B AS IR 01 NNN01</b>	45	770	500	50	6,2	3,6	764	<b>224</b>	168	<b>116</b>	69	1,290
1190 20 rails 5 espaces	<b>BLM050 B AS IR 01 NNN01</b>	45	1190	500	50	8,9	5,3	1118	<b>328</b>	245	<b>168</b>	99	1,310
1400 24 rails 6 espaces	<b>BLL050 B AS IR 01 NNN01</b>	45	1400	500	50	10,6	6,4	1326	<b>389</b>	288	<b>196</b>	114	1,340
1700 28 rails 7 espaces	<b>BLE050 B AS IR 01 NNN01</b>	45	1700	500	50	12,4	7,6	1569	<b>460</b>	340	<b>231</b>	134	1,350

Model	Code	Depth P mm	Height H mm	Width L mm	Conn. C. L' mm	Weight Kg	Cap. lt	Thermal Power				Exp. n.	
								$\Delta t=50^{\circ}\text{C}$ Btu/h	<b>Watt</b>	$\Delta t=40^{\circ}\text{C}$ Watt	$\Delta t=30^{\circ}\text{C}$ Watt (*)		$\Delta t=20^{\circ}\text{C}$ Watt
770 14 rails 3 espaces	<b>BLS050 B IS IR 01 NNN01</b>	45	770	500	50	7,2	3,5	764	<b>224</b>	168	<b>116</b>	69	1,290
1190 20 rails 5 espaces	<b>BLM050 B IS IR 01 NNN01</b>	45	1190	500	50	10,4	5,2	1118	<b>328</b>	245	<b>168</b>	99	1,310
1400 24 rails 6 espaces	<b>BLL050 B IS IR 01 NNN01</b>	45	1400	500	50	12,3	6,2	1326	<b>389</b>	288	<b>196</b>	114	1,340
1700 28 rails 7 espaces	<b>BLE050 B IS IR 01 NNN01</b>	45	1700	500	50	14,4	7,3	1569	<b>460</b>	340	<b>231</b>	134	1,350

AS = Satin Stainless Steel finish code; IS = Mirror finish code

(\*) Thanks to the high performance of Irsap BLUES radiators, the ideal  $\Delta t$  for low temperature projects is  $\Delta t$  at  $30^{\circ}\text{C}$ .

For  $\Delta t$  different from  $50^{\circ}\text{C}$  use the formula:  $Q=Q_n (\Delta t / 50)^n$

### Key Codes

